

Trimoterm

Brand of Trimo Group



**TRIMOTERM FIREPROOF PANELS
PRODUCT RANGE**



Mitglied des:
IFBS
Industrieverband
für Bausysteme
im Metallbaubau



TRIMOTERM FIREPROOF FAÇADE PANELS

Trimoterm FTV




EN 14509



Cert. No. 650a to LPS 1208
Cert. No. 650b to LPS 1181
Cert. No. 650d to LPS 1181

Trimoterm FTV fireproof panels are used for a wide range of external façade cladding, internal partition walls, fire walls and ceilings for either leisure, commercial, industrial, hygienic and other facilities. Panels can be installed in either vertical or horizontal orientation.

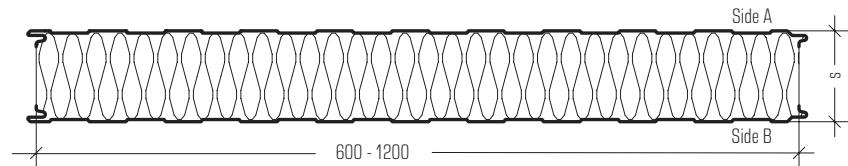

Profile Type	A	B
S - profile (s)	•	•
V - profile (v, v2)	•	•
Smooth profile (G, g)	•	•
Micro-lined profile (m, m3)	•	
Micro-lined profile (m2)		•
Multi vario (X)	•	

Side A is usually the external side of a panel.
Thickness selection for the panels: 50, 60, 80, 100, 120, 133, 150, 172, 200, 240 mm.
Non-standard panel widths can be made by special request.


Panel lengths range up to 14 m.

Additional options and variations of "v" profiles are available upon request.


For all other nonstandard module width sizes and profile finish availabilities please contact Trimo.

External Profile Types:

S - profile (standard profile)




V - profile (v)



V - profile (v2)




Smooth profile (G)




Smooth profile (g)



Micro-lined profile (m)



Micro-lined profile (m3)




Multi vario profile (X01)




Internal Profile Types:


S - profile (standard profile)




V - profile (v)




V - profile (v2)




Smooth profile (G)



Smooth profile (g)



Micro-lined profile (m2)




Calculation of allowed spans is made by the **SandStat software**.

Trimoterm FTV

Panel thickness [mm]	50	60	80	100	120	133	150	172	200	240
EI Fire resistance class (EN 13501-2)	/	EI 30	EI 60		EI 120		EI 180		EI 240	
Combustibility of insulant core (EN 13501-1)										
Rw Sound reduction [dB] (EN ISO 10140-3)		30 (-2, -3)	31 (-2, -3)		32 (-1, -3)			32 (-1, -2)		
Cover width [mm]					600 - 1200					
Panel length [m]						up to 14				

Weight FTV [kg/m ²]	Fe 0.6/Fe 0.6	16.3	17.5	19.9	22.3	24.7	26.3	28.3	31.0	34.3	39.1
*U Thermal transmittance [W/m ² K] (EN 14509)		0.75	0.64	0.49	0.40	0.33	0.30	0.27	0.24	0.20	0.17
**Typical single spans [m]   		3.09	3.72	4.36	4.88	5.34	5.59	5.88	6.22	6.57	7.05

An example of panel marking:

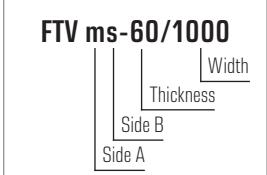

Trimoterm Power

Trimoterm Power is a new range of highly thermal and structural efficient roof and façade panels.

Trimoterm Power brand includes two products:

Trimoterm Power T - panels with higher thermal insulation

Trimoterm Power S - panels with higher structural spanning capabilities



Trimoterm Power T - FTV

up to **10%**
higher thermal insulation

Trimoterm Power T are façade panels with higher thermal insulation. They can reach U value down to 0.16 W/m²K, and **up to 10 % higher thermal insulation**.

Panel thickness [mm]	50	60	80	100	120	133	150	172	200	240	
Weight FTV [kg/m ²]	Fe 0.6/Fe 0.6	n/a	15.8	17.6	19.4	21.2	22.3	23.9	25.9	28.4	32.0
*U Thermal transmittance [W/m ² K] (EN 14509)		n/a	0.58	0.45	0.36	0.30	0.28	0.25	0.21	0.19	0.16
**Typical single spans [m]   		n/a	3.58	4.58	5.29	5.98	6.27	6.60	7.01	7.46	8.03

Panel thickness 250 mm with U value 0.15 W/m²K is available upon special project request. Please contact Trimo representative or Trimo technical support..

Trimoterm Power S - FTV

spanning up to **10 m**

Trimoterm Power S are long spanning façade panels, which reduce the need for secondary steel construction. Frame to frame spanning capability is **up to 10 metres**.


Panel thickness [mm]	50	60	80	100	120	133	150	172	200	240	
Weight FTV [kg/m ²]	Fe 0.6/Fe 0.6	16.0	17.1	19.4	21.7	24.0	25.5	27.4	30.0	33.1	37.7
*U Thermal transmittance [W/m ² K] (EN 14509)		0.77	0.65	0.50	0.41	0.34	0.31	0.28	0.24	0.21	0.17
**Typical single spans [m]   		4.11	4.70	5.65	6.47	7.19	7.54	7.99	8.53	8.94	9.95

Measured on Trimoterm FTV panels modul 1000 mm.


* Data based on typical MW core. For specific project data refer to Technical CE specification data and contact Trimo technical support. Calculated according to EN 14509 standard without consideration of longitudinal joint losses.

** These typical spans are based on a wind pressure and suction of 0.9 kN/m², for guidance only. Project specific structural spans to be checked with Trimo technical support.

An example of panel marking:

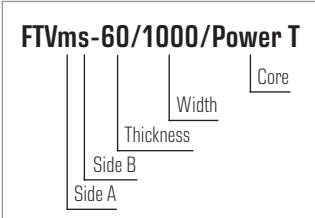

An example of panel marking:

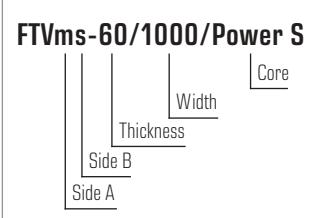


Trimoterm FTV Invisio



Cert. No. 650a to LPS 1208
Cert. No. 650d to LPS 1181

Trimoterm FTV Invisio (FTV HL) fireproof façade panels shows its outrange clean façade outlook with no visible fixings while fixing on intermediate cladding rails is performed through a panel side lap joint by special developed supporting elements. Panels are mainly intended for vertical type of cladding but under certain conditions and limitations can also be used for various horizontal cladding applications.

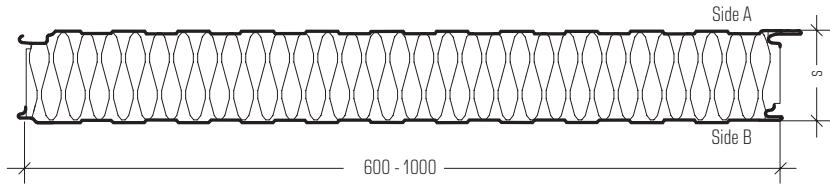


External Profile Types:


Profile Type	A	B
S - profile (s)	•	•
V - profile (v, v2)	•	•
Smooth profile (G, g)	•	•
Micro-lined profile (m, m3)	•	
Micro-lined profile (m2)		•
Multi vario (X)	•	

Side A is usually the external side of a panel.
Thickness selection for the panels: 50, 60, 80, 100, 120, 133, 150, 172, 200, 240 mm.
Non-standard panel widths can be made by special request.

Panel lengths range up to 14 m.
Additional options and variations of "v" profiles are available upon request.
For all other nonstandard module width sizes and profile finish availabilities please contact Trimo.

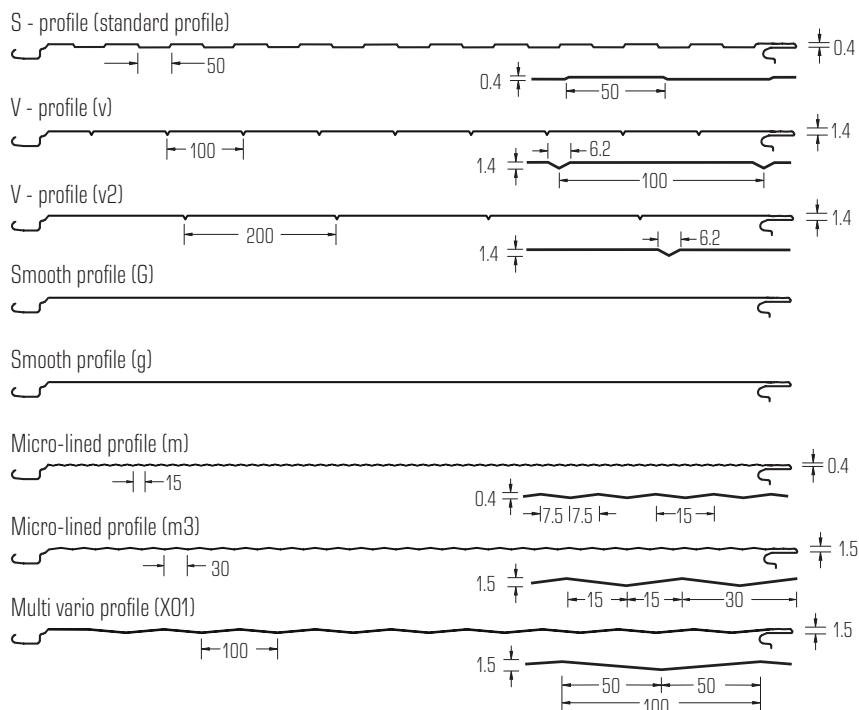

Internal Profile Types:

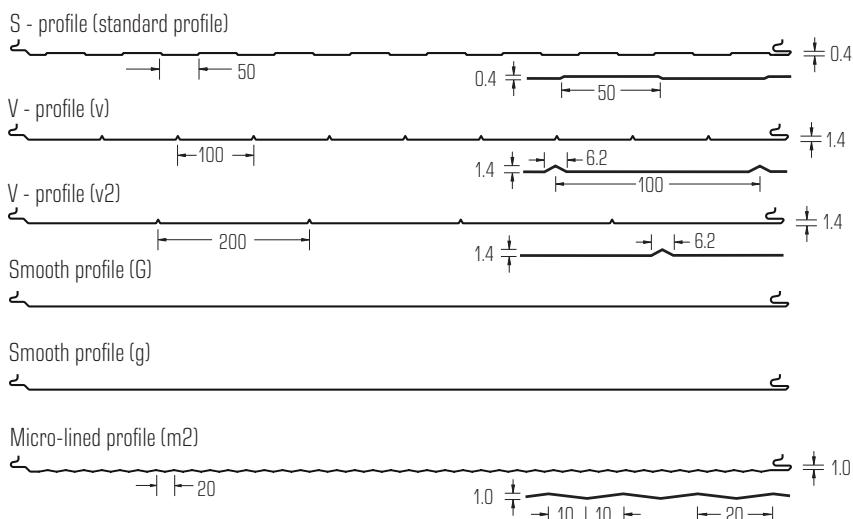


Calculation of allowed spans is made by the **SandStat software**.

Trimoterm FTV HL

Panel thickness [mm]	50	60	80	100	120	133	150	172	200	240
El Fire resistance class (EN 13501-2)	/	EI 30	EI 60		EI 120		EI 180		EI 240	
Combustibility of insulant core (EN 13501-1)										
Rw Sound reduction [dB] (EN ISO 10140-3)		30 (-2, 3)	31 (-2, -3)		32 (-1, -3)		32 (-1, -2)			
Cover width [mm]					600 - 1000					
Panel length						up to 14				
Weight FTV HL [kg/m ²]	Fe 0,6/Fe 0,6	16.5	17.7	20.1	22.5	24.9	26.5	28.5	31.2	34.5
*U Thermal transmittance [W/m ² K] (EN 14509)		0.75	0.64	0.49	0.40	0.33	0.30	0.27	0.24	0.20
										0.17

An example of panel marking:

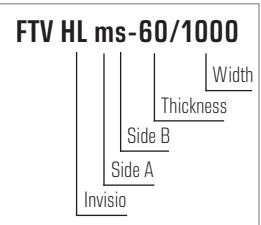

Trimoterm Power

Trimoterm Power is a new range of highly thermal and structural efficient roof and façade panels.

Trimoterm Power brand includes two products:

Trimoterm Power T - panels with higher thermal insulation

Trimoterm Power S - panels with higher structural spanning capabilities



Trimoterm Power T - FTV HL

up to 10%
higher thermal
Insulation

Trimoterm Power T are façade panels with higher thermal insulation. They can reach U value down to 0.16 W/m²K, and **up to 10 % higher thermal insulation**.

Panel thickness [mm]	50	60	80	100	120	133	150	172	200	240
Weight FTV HL [kg/m ²]	Fe 0,6/Fe 0,6	n/a	16.0	17.8	19.6	21.4	22.6	24.1	26.1	28.6
*U Thermal transmittance [W/m ² K] (EN 14509)		n/a	0.58	0.45	0.36	0.30	0.28	0.25	0.21	0.19

Panel thickness 250 mm with U value 0.15 W/m²K is available upon special project request. Please contact Trimo representative or Trimo technical support.


Trimoterm Power S - FTV HL

spanning
up to 10 m

Trimoterm Power S are long spanning façade panels, which reduce the need for secondary steel construction. Spanning capability is **up to 10 metres**.

Panel thickness [mm]	50	60	80	100	120	133	150	172	200	240
Weight FTV HL [kg/m ²]	Fe 0,6/Fe 0,6	16.2	17.4	19.6	21.9	24.2	25.7	27.6	30.2	33.4
*U Thermal transmittance [W/m ² K] (EN 14509)		0.77	0.65	0.50	0.41	0.34	0.31	0.28	0.24	0.21

An example of panel marking:

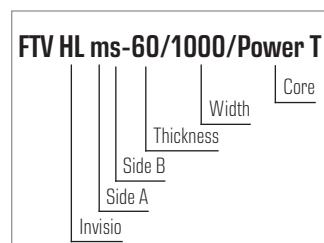


Measured on Trimoterm FTV HL panels modul 1000 mm.

Project specific structural spans to be checked with Trimo technical support.

* Data based on typical MW core. For specific project data refer to Technical CE specification data and contact Trimo technical support. Calculated according to EN 14509 standard without consideration of longitudinal joint losses.

An example of panel marking:

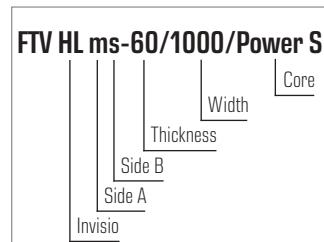


Trimoterm Multivario FTV





EN 14509

The basic model of the Trimoterm Multivario (FTV X and FTV HL X) is the enlarged micro profile. For further possibilities of the internal facing see Trimoterm FTV and FTV HL.

Trimoterm Multivario FTV

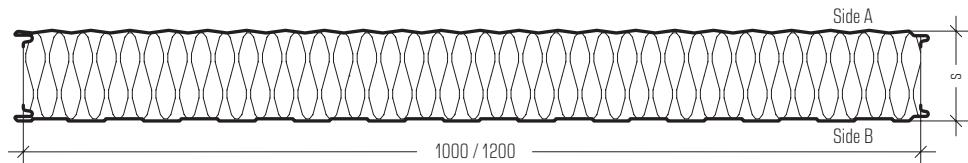


Trimoterm Multivario FTV HL

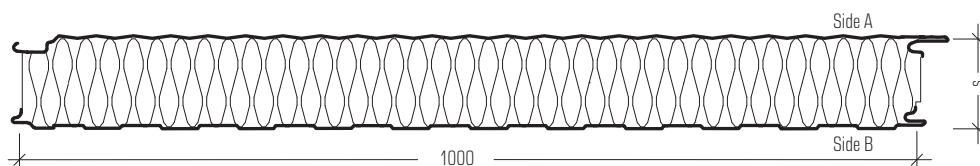

Numerous variations deriving from the basic module are combinations of a flat and ribbed sections throughout the panel surface in intervals of 100 mm. Some of the possibilities are shown below:

An example of panel marking:

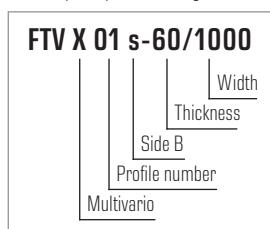


width 1000 mm

- 01
- 04
- 26
- 28

width 1200 mm

- 01
- 06
- 10
- 14
- 18
- 19
- 28
- 31

An example of panel marking:

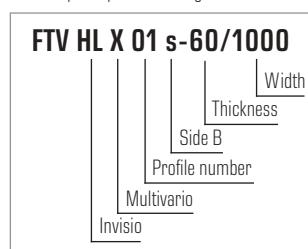


Calculation of allowed spans is made by the **SandStat software**.

For technical performance characteristics please refer to Trimoterm FTV and Trimoterm FTV HL range.

TRIMOTERM ACOUSTIC PANEL

Trimoterm Acoustic


Trimoterm Acoustic panels (FTV-ac, FTV HL-ac, SNV-ac) are used as sound absorbing panels for sound damping in internal applications only. They can be erected as cladding of sound-absorbing cabins, as partition walls and additional cladding on façades and roofs.

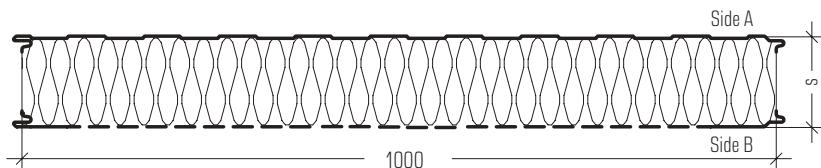

An example of panel marking:

FTV-ac ss-60/1000

Width
Thickness
Side B
Side A
Acoustic

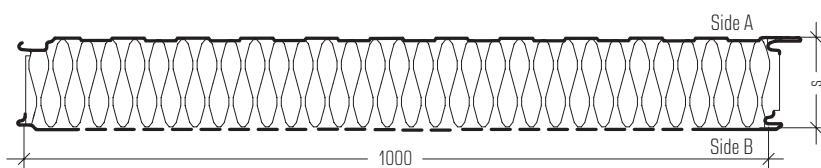

An example of panel marking:

FTV HL-ac ss-60/1000

Width
Thickness
Side B
Side A
Invisio

Panel thickness [mm]	60	80	100	120	133	150	172	200	240
Rw Sound reduction [dB] (EN ISO 10140-3)					34 (-2; -4)				
Sound absorption [dB] (EN ISO 354)					8.3				

Profile Type	A	B
S - profile (s)	•	•
V - profile (v, v2)	•	•
Smooth profile (G, g)	•	•
Micro-lined profile (m, m3)	•	
Micro-lined profile (m2)		•
Multi vario (X)	•	


Side A is usually the external side of a panel.

Thickness selection for the panels: 60, 80,

100, 120, 133, 150, 172, 200, 240 mm.

Panel width is 1000 mm.

Panel lengths range up to 14 m.

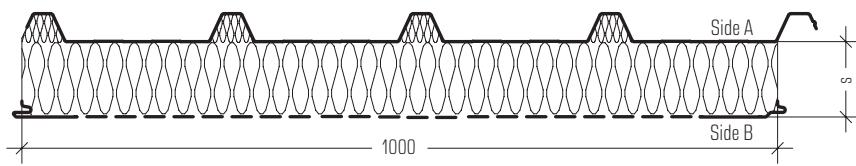

An example of panel marking:

SNV-ac s-60/1000

Width
Thickness
Side B
Acoustic

Panel thickness [mm]	60	80	100	120	150	172	200
Rw Sound reduction [dB] (EN ISO 10140-3)				34 (-2; -4)			
Sound absorption [dB] (EN ISO 354)				8.3			

Profile Type	A	B
Trapezoid	•	
S - profile (s)		•
V - profile (v)		•
Smooth profile (g)		•
Micro-lined profile (m2)		•

Side A is usually the external side of a panel. Thickness selection for the panels: 60, 80, 100, 120, 150, 172, 200 mm.

Panel width is 1000 mm.

Panel lengths range up to 14 m.

Measured on Trimoterm panels modul 1000 mm.

TRIMOTERM FIREPROOF ROOF PANELS

Trimoterm SNV




Cert. No. 650a to LPS 1208
Cert. No. 650b to LPS 1181


Profile Type	A	B
Trapezoid	•	
S - profile (s)		•
V - profile (v)		•
Smooth profile (g)		•
Micro-lined profile (m2)		•

Thickness selection for the panels 60, 80, 100, 120, 150, 172 and 200 mm.
Panel lengths range up to 14 m.



Trimoterm SNV fireproof panels are mainly used with additional sealing of longitudinal joints for roof cladding however they can also be used for the wall cladding. Minimum roof slope is 3° with additional sealing of longitudinal joints.

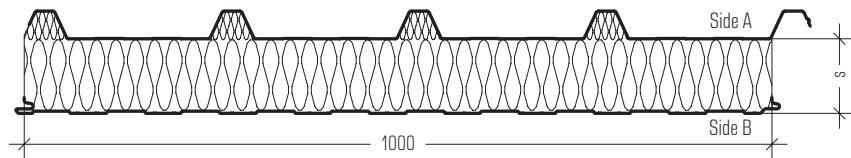

External Profile Types:

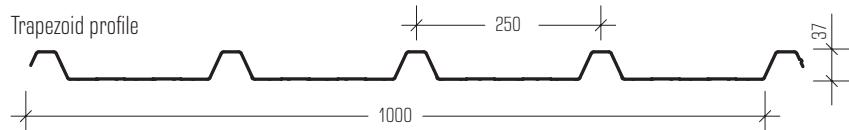

Internal Profile Types:

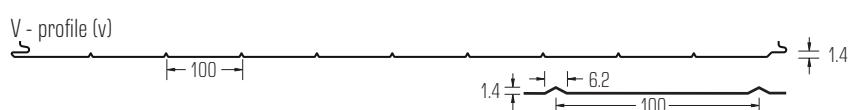


Calculation of allowed spans is made by the **SandStat software**.

Trimoterm SNV

Panel thickness [mm]	60	80	100	120	150	172	200
Fire resistance class SNV (EN 13501-2)	REI 30	REI 60		REI 120		REI 180	
Combustibility of insulant core (EN 13501-1)			Non - combustible, class A1				
Rw Sound reduction [dB] (EN ISO 10140-3)	32 (-1, -4)			33 (-1, -4)			
Min. roof slope			5° or 3° with additional sealing				
Cover width [mm]			1000				
Panel length [m]			up to 14				

Weight SNV [kg/m ²]	Fe 0.6 / Fe 0.6	18.9	21.3	23.7	26.1	29.7	32.4	35.7
*U Thermal transmittance [W/m ² K] (EN 14509)		0.65	0.50	0.40	0.34	0.27	0.24	0.21

An example of panel marking:

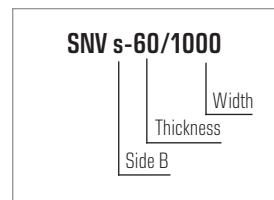


Trimoterm Power T - SNV

up to **11%**
higher thermal
insulation

Trimoterm Power T are roof panels with higher thermal insulation. They can reach U value down to 0.18 W/m²K, and **up to 11 % higher thermal insulation**.



An example of panel marking:

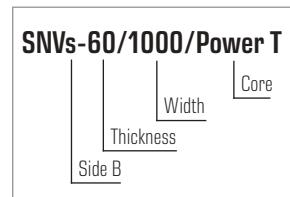


Panel thickness [mm]	60	80	100	120	150	172	200	
Weight SNV [kg/m ²]	Fe 0.6 / Fe 0.6	17.2	19.0	20.8	22.6	25.3	27.3	29.8
*U Thermal transmittance SNV [W/m ² K] (EN 14509)		0.57	0.44	0.36	0.30	0.24	0.21	0.18

Measured on Trimoterm SNV panels modul 1000 mm.


* Data based on typical MW core. For specific project data refer to Technical CE specification data and contact Trimo technical support. Calculated according to EN 14509 standard without consideration of longitudinal joint losses.

Decorative and fixing elements for TRIMOTERM façade panels


HF 102 - Omega Profile

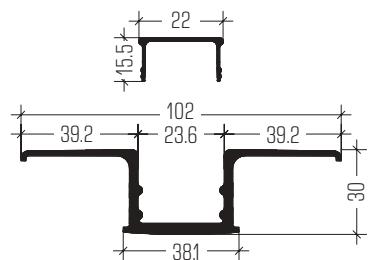


HF5 - Decorative Window Profile

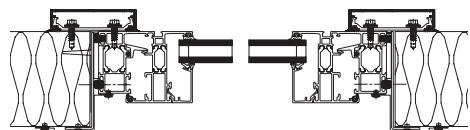

HF6 - Decorative Omega Profile


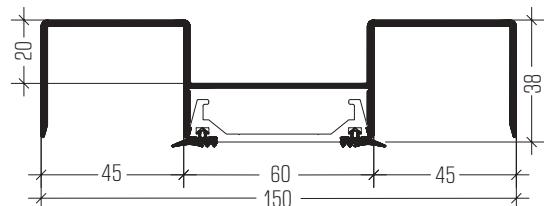


HF4 - Decorative Omega Profile

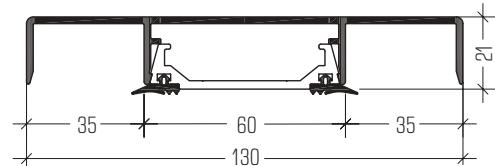


Decorative elements for TRIMOTERM façade panels



HF1 - T Profile

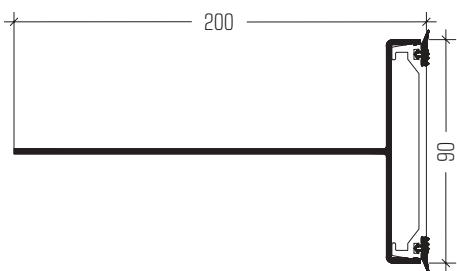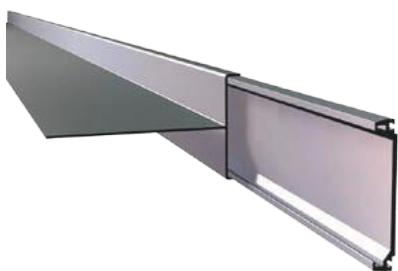


HF2 - Trapezoid Profile

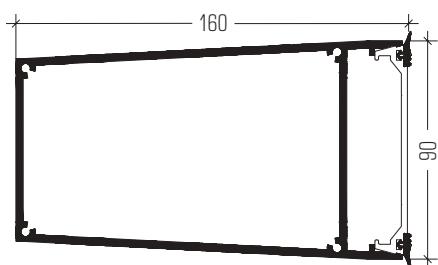


HF7 - Triangular Profile

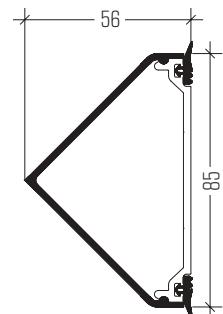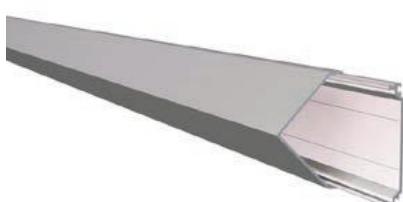

HF8 - Elliptical Profile

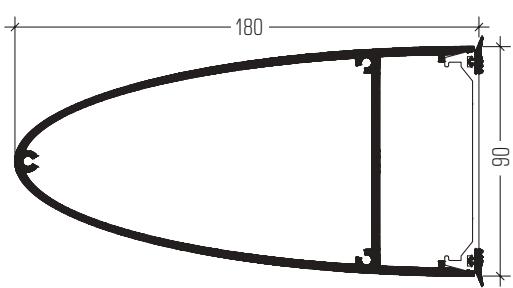

HF9 - Semi-circular Profile

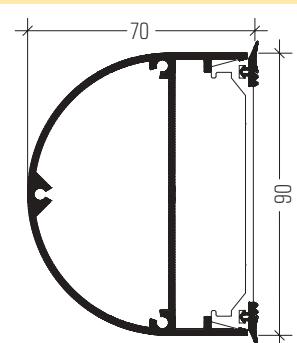



 **Trimo**

Trimo, d.d.

Prijateljeva cesta 12, 8210 Trebnje, Slovenia
t: +386 7 34 60 200, f: +386 7 34 60 127
trimo@trimo.si, www.trimo.eu